


FR: Projecteur FLD75  
 EN: Floodlight FLD75  
 DE: Flutlicht FLD75  
 IT: Proiettore FLD75  
 ES: Proyector FLD75  
 PL: Iluminacja FLD75

PRIME

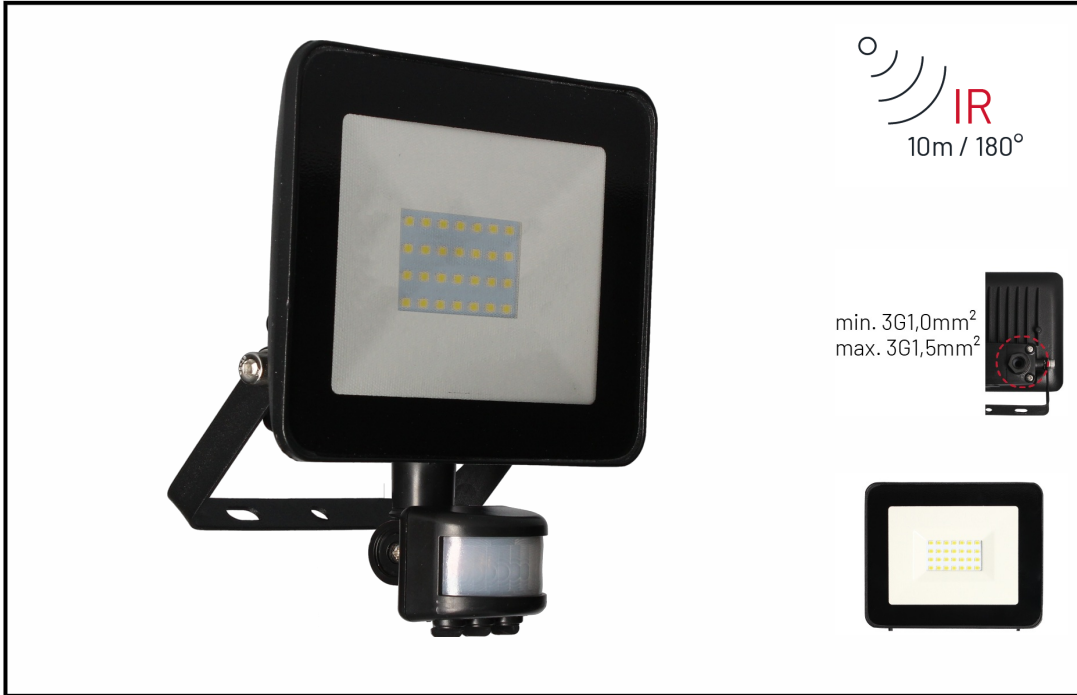

IR  
10m / 180°

min. 3G1,0mm<sup>2</sup>  
max. 3G1,5mm<sup>2</sup>

	30000h
SMD 2835	110°
4000K	<b>CRI</b> > 80
IP44	
220-240V	
ALU	CE

		Fr: 2 types connexions En: 2 types of connection De: 2 Verbindungsarten Es: 2 tipos de conexión It: 2 tipi di connessione It: 2 rodzaje połączeń	
--	--	---	--

				<b>CRI</b>	
3297029505341	30W	2400lm	4000K	> 80	15,7x6,4x17 cm

