



241540 | Vermason




**Sachet de 9 mousses antistatique
haute densité RS Pro - Ep. 6mm -
70kPa - Noire**
Réf 815-3509

94.15€^{TTC*}

Voir le produit :


<https://www.domomat.com/56757-sachet-de-9-mousses-antistatique-haute-densite-rs-pro-ep-6mm-70kpa-noire-rs-pro-815-3509.html>

*Le produit Sachet de 9 mousses antistatique haute densité RS Pro - Ep. 6mm - 70kPa -
Noire
est en vente chez Domomat !*



Datasheet

Conductive Pin-Insertion Foam RS-815-3503

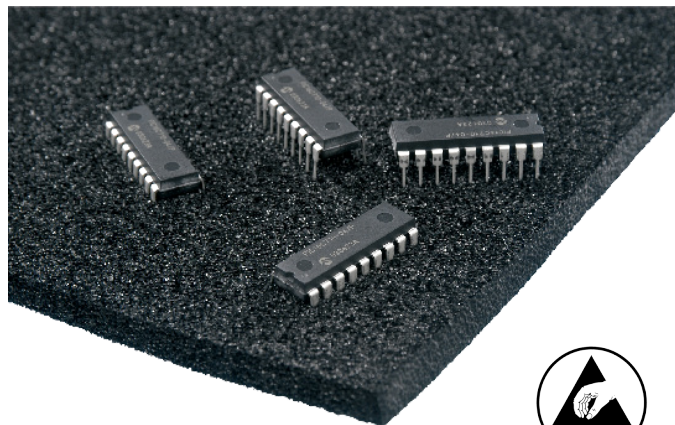

Foam per EN 61340-5

"All generators of electrostatic charges, such as untreated plastic films, foams, synthetic fibres, adhesive tapes, etc., must be prohibited for use as intimate or proximity packaging material and should be kept away from the EPA (ESD Protected Area)". (EN 61340-5-2 section 6)

Inserting terminals in conductive foam will bring all terminals to the same charge level or equipotential protecting the device from a discharge.

"There are two basic points which should be followed throughout:

- only minimal charge, field, or potential should be generated inside an EPA, or should be allowed to come into contact with, or into close proximity to, any ESDS [ESD sensitive items];
- where a charge, field or potential is obtained then it should be removed in a controlled manner.

The most efficient manner of following the two above mentioned basic points in most applications is to provide a resistive path (usually 1 megohm to several tens of megohms) between an equipotential point and operator, equipment and ESDS. This will allow a controlled current path and will prevent any potential build up." (EN 61340-5-2 DD1 Methods)

- A. Vermafoam high-density (HD) is polyether polyurethane foam impregnated with rigid conductive latex.
- B. The HD type has outstanding "pin insertion" properties. It is used to hold devices in place.
- C. Corrosion prone non-ferrous metals such as Zinc, Nickel etc are not corroded when in direct or vapour contact with these conductive foams, even at elevated temperature and humidity.

| Property | Value | Test Method |
|--|---|--|
| Density kg/m ³ | 35-55 | BS 4443 Pt 1 Method 2 |
| Tensile Strength kPa | 70 Minimum | BS 4443 Pt 1 Method 3A |
| Loss in Tensile Strength After Heat Ageing (%) | 30% Max Loss | BS 4443 Pt 1 Method 3A 140°C for 16 hours |
| Loss In Tensile Strength After Humidity Ageing (%) | 30% Max Loss | BS 4443 Pt 1 Method 3A 105°C for 3 hours |
| Volume Resistivity (ohms/m) | ≤ 2.5 x 10 ² | BS 2044 Method 3 (100 Volts) |
| Surface Resistance (ohms) | 1 x 10 ² ≤ 1 x 10 ⁵ | IEC 61340-2-3 |

| Item | Description |
|----------|---|
| 815-3503 | Conductive Pin-Insertion Foam, 6mm x 1m x 1m, Sheet |
| 815-3509 | Conductive Pin-Insertion Foam, 6mm x 305mm x 305mm, Pack of 9 |

Unless otherwise noted, tolerance ±10%

Specifications and procedures subject to change without notice.