

Fiche Tungsram 93111228




LED Precise MR16 8W(35)Dim 927 35
Réf 93111228

4.62€^{TTC*}

Voir le produit :

<https://www.domomat.com/64456-led-precise-mr16-8w35dim-927-35-tungsram-93111228.html>

*Le produit LED Precise MR16 8W(35)Dim 927 35
est en vente chez Domomat !*



* : Prix sur le site Domomat.com au 20/11/2024. Le prix est susceptible d'être modifié.



9
kWh/1000h

78
lumens/watt

LED MR16 - High CRI High Lumen - Dimmable

LED MR16 8W(50)Dim 927 35° TU

93111228

Product information

Tungsr's newest LED technology surpasses current market expectations for MR16 performance and outlook. Superior colour consistency under 4 steps standard deviation of colour maintenance, combined with superlative lumen output all packaged in a visually aesthetic COB design with flat front face glass housing which provides a lighting performance of rare quality and ensures 100% replacement for Halogen lamps in all existing fittings.

Application areas



Retail



Hospitality



Home

Product data

Product Code	93111228
Bulb Finish	White
Bulb maximum overall diameter [mm]	50
Nominal Length [mm]	45.5
Net weight per piece [g]	42
RoHS compliant	Yes
Brand	Tungsram
Cap/Base	GU5.3

Performance data

Nominal/ Rated Beam Angle [°]	35
Rated peak intensity in [Cd]	1000
Weighted energy consumption [kWh/1000h]	8.8
Rated efficacy [lm/W]	77.6
Energy efficiency class (EEC)	G
Rated life L70/B50 [h]	25000
Nominal correlated colour temperature (CCT) [K]	2700
Nominal lumens [lm]	621
Colour Rendering Index (CRI) [Ra]	90


Electrical data

Nominal lamp power factor...	>0.9
Operating Temperature (MIN) [°C]	-20°C
Operating Temperature (MAX) [°C]	+40°C
Starting time (sec)	<0.5 s
Warm up time up to 60% of full light output	Instant on
Number of switching cycles	50000
Dimming Capability	Yes
Nominal power [W]	8
Nominal lamp voltage [V]	12

Logistic data

Shipment	Standard
DUN Code	05994100029441
EAN Code	15994100029448
Pack Quantity	8
Product status	Available

Light distribution

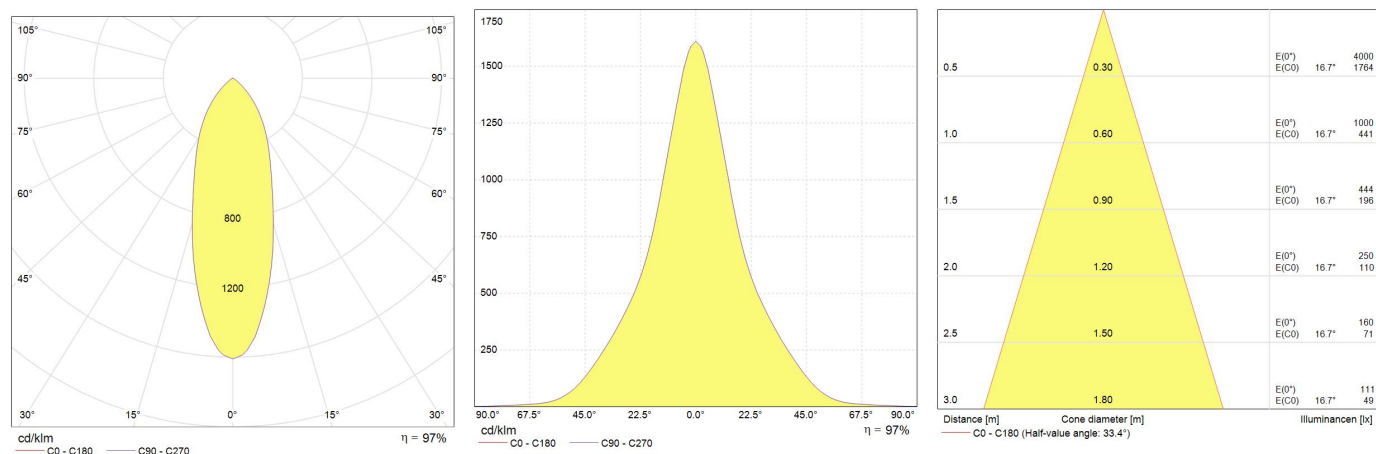

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Photometry \(IES\)](#)

[Datasheet \(PDF\)](#)

[Images \(HTTP\)](#)

[DoC Document \(PDF\)](#)

[Dimming compatibility \(PDF\)](#)